



Harnessing Transdisciplinary Knowledge: Integrated Deep Learning Techniques for Accurate Tomato Leaf Disease Classification

Hiren Mewada^{1,*}, L. Syam Sundar², Miral Desai³, Nayeemuddin Mohammed⁴

¹Electrical Engineering Department, Prince Mohammad Bin Fahd University, P.O.Box 1664, Al Khobar, 31952, Kingdom of Saudi Arabia

²Mechanical Engineering Department, Prince Mohammad Bin Fahd University, P.O.Box 1664, Al Khobar, 31952, Kingdom of Saudi Arabia

³V T Patel Department of Electronics & Communication Engineering, Chandubhai S Patel Institute of Technology, Charotar University of Science and Technology, Changa, Gujarat, India.

²Civil Engineering Department, Prince Mohammad Bin Fahd University, P.O.Box 1664, Al Khobar, 31952, Kingdom of Saudi Arabia

*Correspondence should be addressed to Hiren Mewada, Email: hmewada@pmu.edu.sa.

Received 19 September, 2024; **Revised** 12 November, 2024; **Accepted** 13 November, 2024

Available online 13 November, 2024 at www.atlas-journal.org, doi: 10.22545/2020/00264

Abstract: The study proposes a transdisciplinary approach integrating knowledge from fields such as computer science, botany, and data science to classify leaf diseases. We integrated two deep-learning models that combine the strengths of the Inception network and the ResNet architecture to address the challenge of accurately classifying tomato leaf diseases. The Inception network's ability to quickly pick up visual features on multiple scales is used to pull out fine-grained details that are needed to tell the difference between small changes in the shape of tomato leaves and disease symptoms. The ResNet architecture is good at learning deep representations and getting around the vanishing gradient problem. This lets the model learn the high-level concepts and complicated connections between different tomato leaf disease patterns. The integration of these two powerful deep-learning techniques results in a robust and highly performant tomato leaf classification model. Extensive tests on a 10-class dataset of tomato leaves, with 9 disease categories and 1 healthy class, show that the proposed model works better than others, with a test set accuracy of 98.07%. The findings of this research contribute to the advancement of automated and efficient tomato leaf disease detection systems, which can aid in the early identification and management of tomato diseases, leading to improved crop yields and quality.

Keywords: Agriculture, Leaf Disease, Sustainability, Artificial Intelligence, Deep Learning

1 Introduction

Disease classification varies significantly across humans, animals, and plants due to differences in biology, ecology, and the pathogens involved. In humans, diseases are often categorized based on their causes—such as infectious, genetic, or environmental factors [1, 2]—while in animals, classifications may consider the type of host, the mode of transmission, and the impact on populations. Fungi, bacteria, viruses, and nematodes are just a few examples of the causal agents that cause diseases in plants, along with the symptoms they cause. These variations highlight the complexity of disease dynamics in different kingdoms of life, necessitating tailored approaches for diagnosis, treatment, and management.

The tomato, scientifically known as *Solanum lycopersicum*, is a highly-grown and economically significant vegetable crop on a global scale. However, tomato plants are susceptible to a variety of bacterial, fungal, and viral diseases that can have a substantial effect on the productivity and excellence of crops. Prompt and precise detection of tomato leaf diseases is essential for implementing suitable disease management measures and avoiding crop losses.

Conventional techniques for diagnosing tomato leaf diseases typically depend on visual examination by specialists, a process that can be time-consuming, subjective, and require substantial expertise. The development of automated and efficient leaf disease finding and its classification systems using advanced machine-learning techniques has become an active area of research in recent years. An effective method involves utilizing convolutional neural networks (CNNs) to classify tomato leaf diseases based on images. CNNs have exhibited exceptional efficacy in diverse image recognition assignments, encompassing the identification of plant diseases. Transfer learning, a method that takes what a CNN has learned from being trained on a large, general dataset and tweaks it for a specific task, has shown a lot of promise in making tomato leaf disease classification models more accurate and useful.

Saeed et al [3] compared the Inception ResNet V2 and Inception V3 networks to classify whether tomato leaf is healthy. They investigated the model at various dropout layers and achieved 99.22% two-class classification accuracy with 15% dropout. A multiclass categorization of leaf disease plays a crucial role compared to binary classes. Reference [4] combined the datasets of leaves for fourteen species. Later, a comparison of Inception-v3, Inception-ResNet-v2, and ResNet34 networks was presented with the highest accuracy of 97.03% using ResNet35. The Plant Village dataset was used by the authors [5]. They proposed using the inception v3 network to classify these images into four categories, including healthy tomato leaves. In terms of performance, Inception-v3 outperforms ResNet-50 with a validation accuracy of 98.3%. A lightweight CNN network was presented by Li Sun et al. [6] using SqueezeNet and SENet and the model succeeded with 98.39% in detecting diseases and pests. A Generative Adversarial Network was used for image augmentation and augmented images were classified using the Inception V3 network. The author was able to achieve 88.6% accuracy [7]. A lightweight CNN network was presented in [8] for grid stability analysis and presented an interdisciplinary approach to the CNN network.

Leaf segmentation from plant image is a big challenge before classifying its diseases. Mewada and Patoliya presented a real-time leaf image acquisition process and later SVM was used to classify its disease [9]. Seven diseases were accounted for [10] and improved YOLOv7 was used to locate and classify leaves of tomatoes in the field. The images were segmented using the Scale-Invariant Feature Transform (SIFT), and feature values were retrieved from the important regions. Subsequently, these features were transmitted to a CNN for recognition, boasting an impressive accuracy rate of 98.8%. Pravin and Deepa [18] used a deep CNN network for feature extraction and later machine learning models were used to classify pepper plants into fifteen categories from the leaf images. The integration of deep network with Random Forest classifier performed best among all with an 88% classification rate. Bharali et al. [17] employed image augmentation techniques to enhance the dataset size essential for deep learning training. With a total of 152,850 trainable parameters, their Improved CNN achieved an impressive training accuracy of 99.68% and a validation accuracy of 89%. However, the significant deviation between the training and validation accuracies suggests that their model may be overfitting.

In this article, we explore a transdisciplinary approach to classifying leaf diseases of tomato plants from images using Convolutional Neural Networks (CNNs). By integrating knowledge from fields such as

computer science, botany, and data science, we harness advanced machine-learning techniques to analyze and interpret complex biological data. This collaborative framework not only enhances the accuracy of disease identification but also bridges the gap between technology and agriculture, fostering innovative solutions that can significantly impact crop health management and food security. Through this interdisciplinary lens, we aim to contribute to a more sustainable agricultural future.

The primary contribution of this work is the development of a robust and accurate tomato leaf classification model combining the features of the Inception network and ResNet architectures. Previous approaches have typically utilized a single DL model for this task, but we hypothesized that integrating multiple network types could enhance the overall classification performance. By adopting the Inception network to capture fine-grained visual features and the ResNet architecture to model higher-level abstractions, our hybrid model was able to achieve cutting-edge classification accuracy across 10 distinct tomato leaf classes. This is a significant advancement over existing methods, which have struggled to reliably distinguish between the subtle visual differences in tomato leaf morphology and disease symptoms. The ability to automatically and precisely classify tomato leaf types has important implications for precision agriculture, enabling farmers to quickly identify and respond to emerging plant health issues. The promising results of this work demonstrate the value of strategically combining complementary deep learning techniques to handle complex visual classification issues in the agricultural domain. Overall, the paper structure is as follows: Section 2 presents the proposed model. The subsequent findings and their analysis were presented in Section 3, followed by a conclusion and future work in Section 4.

2 Proposed Model

To address the challenge of accurately classifying tomato leaf diseases, our proposal entails an integrated DL network that amalgamates the distinguishing characteristics of the Inception network and the ResNet architecture. The residual features provide low-level details [11] which are necessary to differentiate the leaf spots. The rationale behind this hybrid approach is to leverage the complementary capabilities of these two well-established neural network models.

The Inception network is known for its ability to efficiently capture multi-scale visual features by employing parallel convolutional filters of varying sizes. This allows the model to extract fine-grained details that are crucial for distinguishing between the subtle differences in tomato leaf morphology and disease symptoms. The network's depth and the use of inception modules enable it to learn complex visual representations that are well-suited for the 10-class tomato leaf classification task, which includes 9 disease categories and 1 healthy class. On the other hand, the ResNet architecture is renowned for its effectiveness in learning deep representations and overcoming the vanishing gradient problem, which is a prevalent obstacle in training very DL networks. The residual connections in ResNet allow the model to maintain a stable flow of gradients during backpropagation, enabling the training of an exceptionally deep network with 824 layers. This depth is necessary to effectively model the high-level abstractions and complex relationships between the various tomato leaf disease patterns. By integrating the Inception network and the ResNet architecture, our proposed model can leverage the best of both worlds. The Inception modules capture the fine-grained visual features, while the deep ResNet structure learns the higher-level representations necessary for accurate disease classification.

2.1 Architecture overview of Inception-ResNet

Inception-ResNet v2 consists of several blocks that alternate between Inception modules and residual connections. The architecture typically starts with a stem that processes the input image, followed by a series of Inception-ResNet blocks. These blocks can be categorized into two types:

- Inception-ResNet-A: These blocks feature a combination of 1x1, 3x3, and 5x5 convolutions, with residual connections that add the input to the output of the block.

- Inception-ResNet-B and C: These are variations that adjust the configuration of the convolutions to optimize performance for different tasks.

The final layers of the network include global average pooling followed by a fully connected layer, producing the output probabilities for classification tasks.

As suggested by [12], every Inception block is followed by a filter-expansion layer consisting of a 1×1 convolution without activation. The purpose of this layer is to augment the dimensionality of the filter bank to align it with the dimension of the input. In addition, the inception-Resnet uses a batch normalization layer compared to the Inception network without a residual layer. Figure 1 shows a schematic opted from [12] for the Inception-Resnet-V2 network's component. Combining these powerful deep-learning techniques results in a robust and highly performing tomato leaf classification model

The overall flowchart of the proposed integrated Inception-ResNet network is depicted in Figure 2. Dividing a dataset into training, testing, and validation sets is a fundamental practice in machine learning and helps ensure the robustness and reliability of a model. The training set is used to train the model. It contains the input data along with the corresponding labels. The model learns the patterns and relationships in the data from this set. A well-sized training set enables the model to capture the underlying trends effectively. The validation set is used to fine-tune the model's hyperparameters and evaluate its performance during training. It provides a way to monitor the model's ability to generalize to unseen data. By using this set, you can assess how changes in hyperparameters (like learning rate or architecture) affect performance without touching the test set. The test set is used only after the model has been trained and validated. It serves as a final evaluation of the model's performance. By testing the model on this independent set, we can gauge its performance on new, unseen data in real-world scenarios.

3 Results and Discussion

3.1 Dataset

The original dataset contains images of leaf diseases from 38 species [13]. A total of 10 classes of tomato leaves were extracted from this dataset and used to validate the performance of the used network. This dataset has images of nine diseases, including Yellow-leaf mold, leaf curl virus, light blight, Mosaic virus, early blight, Septoria leaf spot, target spot, bacterial spot, Spider mites Two-spotted spider mite. One class of healthy images is also provided separately. The breakdown of the number of images in each category is listed in Table 1.

Table 1: Leaf disease types and set of images from the dataset

Leaf disease type	Number of Images
Bacterial_spot	1702
Early_blight	1920
Late_blight	1851
Leaf_Mold	1882
mosaic_virus	1790
Septoria_leaf_spot	1745
Spider_mites Two-spotted_spider_mite	1741
Target_Spot	1827
Yellow_Leaf_Curl_Virus	1961
Healthy	1926

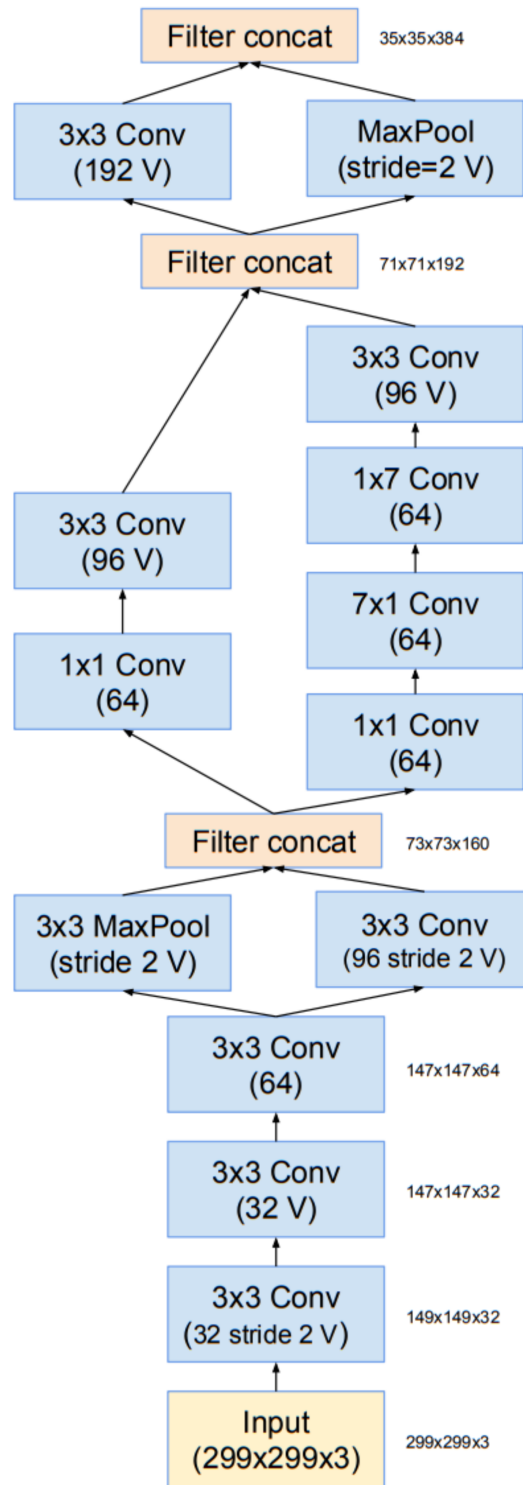


Figure 1: A component of Inception-ResNet-V2 Schematic [12]

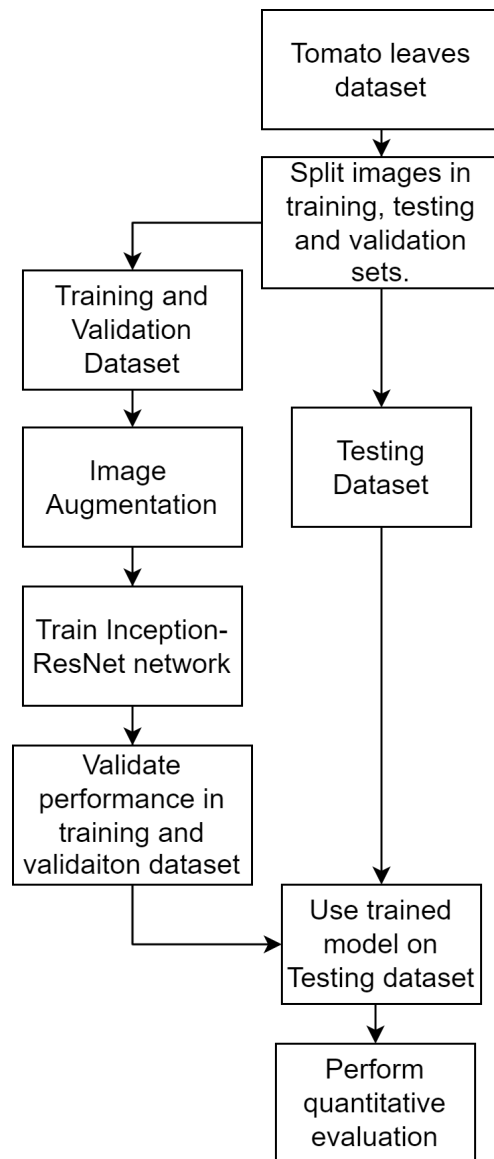


Figure 2: Flow chart for the Inception-Resnet network-based classification

3.2 Experiment Results and analysis

The collection of images is partitioned into training, validation, and testing sets in a ratio of 70:15:15.. The proposed model was trained for 10 epochs with 200 iterations per epoch. Figure 3 shows the accuracy and loss over the epoch during the training process. The model succeeded with 96.87% accuracy on the validation images and the model achieved 99% accuracy on the training image set.

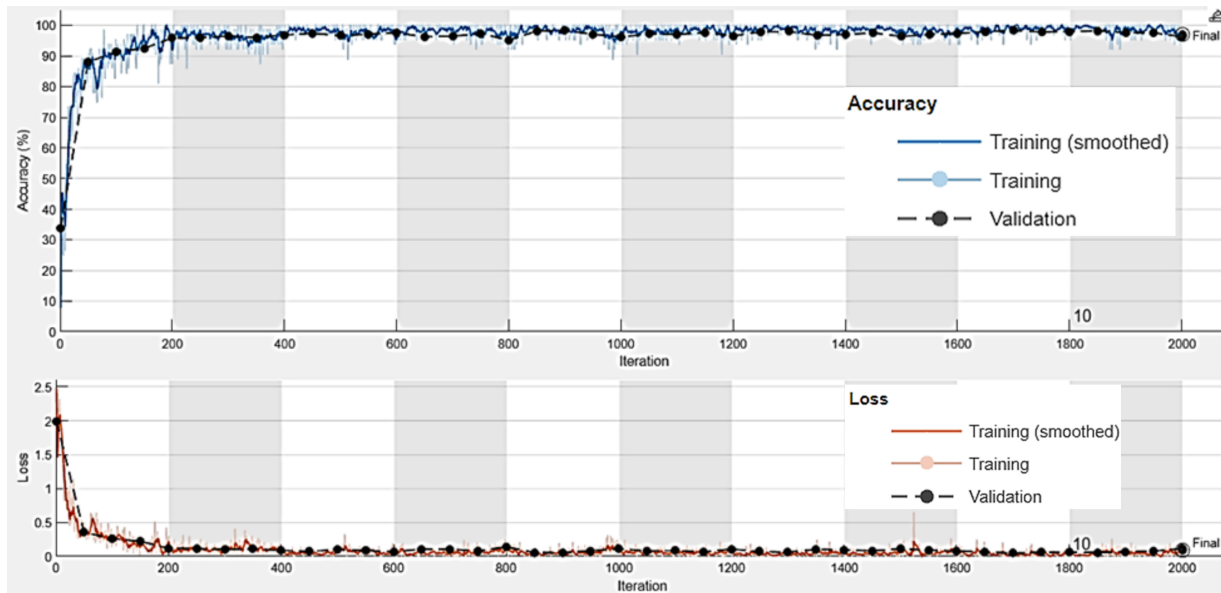


Figure 3: Accuracy and Loss variation over epochs during network training

A confusion matrix summarizes the performance of a classification model by displaying the number of correct and incorrect predictions made for each class. Figures 4 and 5 show the confusion matrix obtained on the validation and test dataset. On the validation dataset, 13 images out of 143 images of the early bright disease were misclassified as septoria leaf spots. The large numbers in the diagonal and the least numbers in other cells show that the model is able to differentiate all 10 classes well. The accuracy, precision, recall, and F1-score for the test dataset are listed in Table 2.

Table 2: Quantitative evaluation of the network on the test dataset

Parameter	Score
Precision	0.9806
Recall	0.9810
Specificity	0.9979
Accuracy	0.9807
F1-Score	0.9804

Further assessment of the model is performed by comparing its accuracy with recent literature. Arnes et al [14] presented a deep CNN network with 43.652 million parameters to classify tomato leaves into ten classes, including the healthy class. They compared the VGG Net, ShuffleNet, and SqueezeNet and their presented network and achieved a comparable accuracy of 97.15%. A deep CNN network was developed to classify leaves into 10 classes. The author validated the model for various epoch numbers and they observed that their model obtained maximum accuracy, i.e., 98.4% by training the model with 5000 epochs [15]. Their model observed a large training time and it needed a large number of epochs. A deep CNN for mobile application was built to detect 10 most diseases [16]. However, their model obtained 88.4%

True Class	Bacterial_spot	124							1	
	Early_blight	2	123			1	13		2	
	Healthy			141						
	Late_blight				135	1				
	Leaf_Mold					139				
	Septoria_leaf_spot				1	2	125			
	Spider_mites							127	1	
	Two-spotted_spider_mite									
	Target_Spot						1	1	132	
	Yellow_Leaf_Curl_Virus							1		143
	mosaic_virus			1						130
		Bacterial spot Early_blight Healthy Late_blight Leaf_Mold Septoria_leaf_spot Spider_mites Two-spotted_spider_mite Target_Spot Yellow_Leaf_Curl_Virus mosaic_virus								
		Predicted Class								

Figure 4: Confusion matrix for validation datasets

accuracy only. Debabrat Bharali [17] enhanced the CNN model using image augmentation and tomato leaves were categorized into several diseases with 89% accuracy on the test dataset [17]. Thus, the training time required for the proposed model is much less. Table 3 compares the results of the proposed model with recent literature. It shows that the proposed Inception-ResNet v2 model succeeded in achieving the same accuracy level within 5 epochs only. In [18], authors extracted CNN features and these features were used for the classification. Various machine learning models, including Naive Bayes, support vector machine, logistic regression model, and random forest were compared. In their experiment, the authors used only 132 images of tomato leaves. Their random forest model performed best among all with 96% precision 94% recall and 92% F1-Score for tomato leaves and received 88% accuracy overall for 12 leave plants.

Overall, the comparison highlights that the Proposed Network is a strong candidate, achieving a high classification accuracy of 98.07% on the 10-class tomato leaf disease dataset, making it a competitive and potentially superior solution compared to the other models presented. The findings of this research will

Table 3: Accuracy comparison with literature on tomato leaf dataset

Algorithm	Number of Classes	Accuracy (in%)
Deep CNN Network [14]	10	97.15
CNN network [15]	10	98.4
Hu-moments+HSV features + ANN [15]	10	92.9
MobileNet [16]	10	88.4
Enhanced CNN [17]	7	89
Deep CNN Features + Random Forest [18]	2	94
Proposed Network	10	98.07

True Class	Bacterial_spot	124								1		
	Early_blight	1	128		3		8		1			
	Healthy			142								
	Late_blight				136							
	Leaf_Mold					138						
	Septoria_leaf_spot					2	125	1				
	Spider_mites							128				
	Two-spotted_spider_mite											
	Target_Spot	5					2		127			
	Yellow_Leaf_Curl_Virus							1		143		
	mosaic_virus						1			131		
		Predicted Class										
		Bacterial_spot	Early_blight	Healthy	Late_blight	Leaf_Mold	Septoria_leaf_spot	Spider_mites	Two-spotted_spider_mite	Target_Spot	Yellow_Leaf_Curl_Virus	mosaic_virus

Figure 5: *Confusion matrix for test datasets*

contribute to the advancement of automated and efficient tomato leaf disease detection systems, which can aid farmers, extension workers, and researchers in the early identification and management of tomato diseases, leading to improved crop yields and quality.

4 Conclusion

The proposed integrated Inception-ResNet model has proven to be highly effective in accurately categorizing tomato leaf diseases, achieving a high classification accuracy of 98.07% on a 10-class dataset. By leveraging the complementary strengths of the Inception network and the ResNet architecture, the model is able to capture fine-grained visual features as well as learn the complex representations necessary for distinguishing between the various tomato leaf disease patterns. The performance of the integrated network outperforms recent cutting-edge DL models in identifying leaf disease types, highlighting its potential as a competitive and superior solution. The findings of this study contribute to the advancement of automated and efficient tomato leaf disease detection systems, which can aid farmers, extension workers, and researchers in the early identification and management of tomato diseases, ultimately enhancing the quality and productivity of tomatoes.

Authors' Contribution: This paper was written collaboratively by the authors. All authors have read and agreed to the published version of the manuscript.

Funding Statement: There is no funding for this manuscript.

Conflicts of Interest: Authors declare no conflict of interest regarding the publication of this paper.



Copyright © 2024 by the author(s). This is an open access article distributed under the Creative Commons Attribution License (CC BY-NC International, <https://creativecommons.org/licenses/by/4.0/>), which allow others to share, make adaptations, tweak, and build upon your work non-commercially, provided the original work is properly cited. The authors can reuse their work commercially.

References

- [1] Hecker, L. (2016). Transdisciplinary approaches in the development of novel therapies for the treatment of fibrotic diseases. *Transdisciplinary Journal of Engineering & Science*, 7.
- [2] Kapçiu, R and Preni, B and Kalluçi, E (2024). It-enabled wgcna for critical gene module mapping and therapy optimization: Advancing leukemia care. *Transdisciplinary Journal of Engineering & Science*, 15.
- [3] Saeed, A., Abdel-Aziz, A., Mossad, A., Abdelhamid, M. A., Alkhaled, A. Y., and Mayhoub, M. (2023). Smart detection of tomato leaf diseases using transfer learning-based convolutional neural networks. *Agriculture*, 13(1):139.
- [4] Pavel, M. I., Rumi, R. I., Fairouz, F., Jahan, S., and Hossain, M. A. (2021). Deep residual learning approach for plant disease recognition. In *International Conference on Mobile Computing and Sustainable Informatics: ICMCSI 2020*, pages 511–521. Springer
- [5] Sauda, S., Kaur, L., and Lal, M. (2021). Comparison of Pre-trained Deep Model Using Tomato Leaf Disease Classification System. In *Machine Intelligence and Smart Systems: Proceedings of MISS 2020* (pp. 553-566). Springer Singapore.
- [6] Sun, L., Liang, K., Wang, Y., Zeng, W., Niu, X., and Jin, L. (2024). Diagnosis of tomato pests and diseases based on lightweight cnn model. *Soft Computing*, 28(4):3393–3413
- [7] Gandhi, R., Nimbalkar, S., Yelamanchili, N., and Ponkshe, S. (2018). Plant disease detection using cnns and gans as an augmentative approach. In *2018 IEEE International Conference on Innovative Research and Development (ICIRD)*, pages 1–5. IEEE.
- [8] Mewada, H., Sundar, L. S., Patel, B., Desai, M., and Khan, A. (2024). A lightweight sequential convolutional neural network for smart grid stability analysis. *Transdisciplinary Journal of Engineering & Science*, 15.
- [9] Mewada, H. K. and Patoliya, J. J. (2021). Iot based automated plant disease classification using support vector machine. *International Journal of Electronics and Telecommunication*, 67(3):517–522.
- [10] Umar, M., Altaf, S., Ahmad, S., Mahmoud, H., Mohamed, A. S. N., and Ayub, R. (2024). Precision agriculture through deep learning: Tomato plant multiple diseases recognition with cnn and improved yolov7. *IEEE Access*, 12: 49167-49183.
- [11] Extended deep-learning network for histopathological image-based multiclass breast cancer classification using residual features. *Symmetry*, 16(5):507.
- [12] Szegedy, C., Ioffe, S., Vanhoucke, V., and Alemi, A. (2017a). Inception-v4, inception-resnet and the impact of residual connections on learning. In *Proceedings of the AAAI conference on artificial intelligence*, 31:4278-4284.

- [13] Mohanty, S. P. (2024). Plant village dataset. <https://github.com/spMohanty/PlantVillage-Dataset>. [Online; accessed 8-August-2024].
- [14] Sembiring, A., Away, Y., Arnia, F., and Muharar, R. (2021). Development of concise convolutional neural network for tomato plant disease classification based on leaf images. In *Journal of Physics: Conference Series*, 1845, page 012009. IOP Publishing.
- [15] Agarwal, M., Gupta, S. K., and Biswas, K. K. (2020). Development of efficient cnn model for tomato crop disease identification. *Sustainable Computing: Informatics and Systems*, 28:100407.
- [16] Elhassouny, A. and Smarandache, F. (2019). Smart mobile application to recognize tomato leaf diseases using convolutional neural networks. In *2019 International Conference of Computer Science and Renewable Energies (ICCSRE)*, pages 1–4. IEEE.
- [17] Bharali, D. (2024). An improved cnn model for identifying tomato leaf diseases. *Transdisciplinary Journal of Engineering & Science*, 15.
- [18] Pravin, A. and Deepa, C. (2022). Piper plant classification using deep cnn feature extraction and hyperparameter tuned random forest classification. *Transdisciplinary Journal of Engineering & Science*, 13.

About the Author



Dr. Hiren Mewada is an Assistant Research Professor at Prince Mohammad Bin Fahd University, Al Khobar, Kingdom of Saudi Arabia, and held other previous positions as an Associate Professor in the Electronics Engineering Department at Charotar University of Science and Technology, Gujarat, India. He has more than 18 years of academic and research experience. Hiren has completed his Ph.D. and M.Tech. in Electronics Engineering from S.V. National Institute of Technology – Surat, Gujarat, India. His research interest lies in the area of Signal/Image processing, ranging from Software simulation to hardware implementation including FPGA and ARM processor-based design. He has focused on the implementation of signal processing and Image segmentation algorithms using an FPGA or ARM cortex A8 processor; and Video analysis and summarization applications. He is a life member of IETE and ISTE. During his academic career, he has taught various courses at UG/PG/Ph.D. level and has authored one book and four chapters in different book series. He has completed several research projects from different agencies including the Board of Research in Nuclear Science (BRNS), the Government of India, the Gujarat Council of Science and Technology (GUJCOST), the Government of Gujarat, Solution with Innovation, USA. He has published more than 100 papers including peer-reviewed international journals and conferences. He supervised six PH D students. He has guided more than 33 PG students and 50 UG students.



Dr. Syam Sundar Lingala obtained his doctorate degree in the field of Mechanical Engineering (Energy Systems) from the Jawaharlal Nehru Technological University-Hyderabad, Hyderabad, India in 2010 and Post-Doctoral Research Fellow from the University of Aveiro, Portugal, M. Tech in Thermal Engineering from the Jawaharlal Nehru Technological University-Hyderabad, Hyderabad, India in 2003 and B.E. in Mechanical Engineering from the Andhra University, India in 1998. His research interests include energy, thermal power plants, modeling, and optimization of forced convection heat transfer from tube banks and micro-channel heat sinks, thermal system optimization using entropy generation minimization and genetic algorithm, mixed convection, and Nanofluids. Dr. Syam Sundar Lingala has guided 02 PhDs, and 04 Master thesis and 02 PhDs are ongoing. Dr. Syam Sundar Lingala is in the top 100 100,000 or in the top 2% of the most cited researchers in the world throughout their career and in their scientific field, according to a Stanford University study signed by the team led by John P.A. Ioannidis. He has more than 100 publications in refereed international journals and 10 book chapters.



Dr. Miral M Desai is an Assistant Professor at Charotar University of Science & Technology, Changa, Gujarat, India. He has more than 10 years of academic and research experience. He has completed his Ph.D. from Charotar University of Science & Technology, Changa, Gujarat, India, and his M.Tech. in Embedded Systems from the Institute of Technology, Nirma University, Ahmedabad, Gujarat, India. His research interest lies in the area of Machine Learning, Deep Learning, Computer vision algorithms, embedded system design, and Embedded Linux-based applications. He is a member of IEEE. He has published 17 papers, including peer-reviewed international journals and conferences. He is a life member of ISTE.



Mr. Mohammed Nayeemuddin is an Instructor at Prince Mohammad Bin Fahd University, Al Khobar,

Kingdom of Saudi Arabia and held other previous positions as a Lecturer in the Department of Civil Engineering at Khaja Banda Nawaz University, Karnataka, India. He has more than 10 years of academic and research experience. Mohd Nayeemuddin has completed his Master in Technology in Civil Structural Engineering from Khaja Banda Nawaz University, Karnataka, India. His research interests in the area of RCC design of buildings, structural steel design, Foundation design, applying seismic earthquake and wind load by using structural applications like ETABS, STAAD PRO, Safe, SAP 2000, Auto CAD, RCDC, Prokon, Primavera Software. Under Environmental Engineering such as, the treatment of seawater, pollutants removal from seawater and oil produced water under the solar and artificial source of light. Application of MATLAB (Artificial Neural Network) tool, Fuzzy analysis, regression model, optimization, ANOVA, variance, backpropagation methods, genetic algorithm, Levenberg Marquardt method. Statistical analysis with response surface methodology optimization, simulation for experimental variables of seawater samples. Mohd Nayeemuddin has more than nearly 27 publications to his credits in Journals, conferences, and chapters of International reputed and has a total of 13 years of experience in teaching and 4 years of experience in industry. In addition, he guided more than 30 engineering students for the senior design projects in civil engineering department.
